

# MMCX Right Angle Male Crimp 100, RG-174 series cable


# EZ-MMCXRA100

**MMCX Right Angle Male Crimp 100, RG-174 series cable.**

MMCX coaxial connectors are medium-sized, coupling connectors designed for use from DC to 11 GHz.

Their consistently low broadband VSWR have made them popular over the years in many applications.

The MMCX series connector is impedance matched to 50 ohm cables.

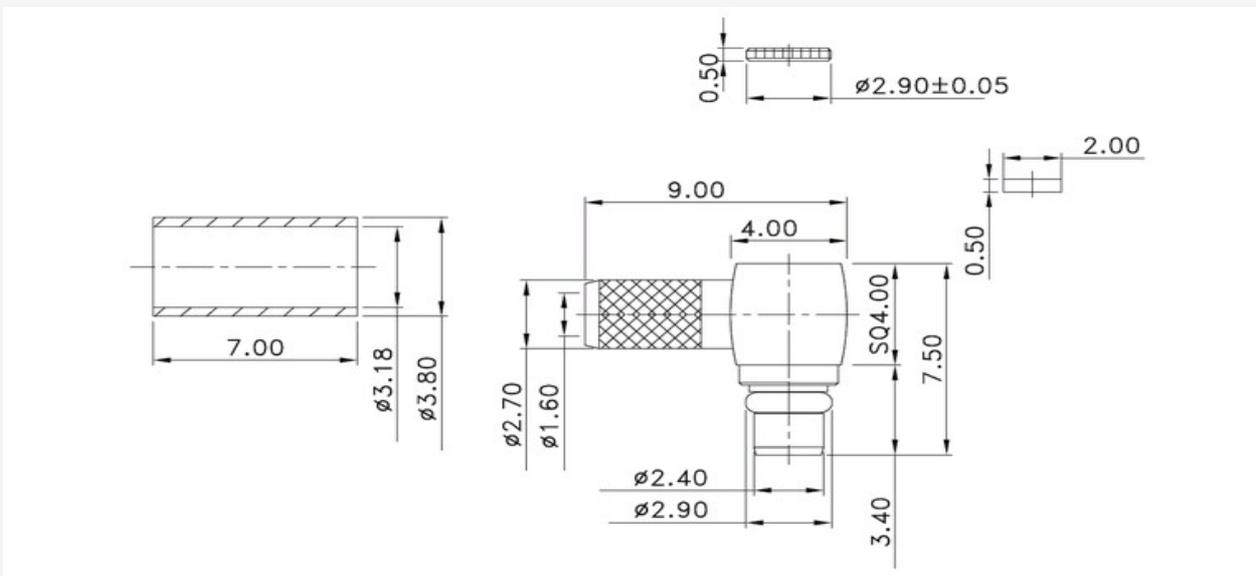

TECHNICAL SPECIFICATIONS	
Impedance	50 ohm
Frequency Range	0 to 11.0 GHz
V.S.W.R.	1.3 max
Working Voltage	1,000 volts rms max at sea level
Dielectric Withstanding Voltage	2,500 volts rms max at sea level
Contact Resistance	Center contact=1.0 Milliohms max
Contact Resistance	Outer contact=1.0 Milliohms max
Insertion Loss	0.3 dB max at 10 GHz
Insulation Resistance	5,000 Megohms min
Body (Material/Finish)	Brass/Gold
Center Pin (Material/Finish)	Bronze/Gold
Crimp Tube (Material/Finish)	Annealed Copper/Gold
Dielectric	Teflon

Connector
MMCX

Male Body
Male Center Pin

