

# MMCX Right Angle to RP-SMA Male Bulkhead 25cm


## EZ-MMCXRA2RPSMAB25

**MMCX Right Angle** to RP-SMA Male Bulkhead 25cm.

MMCX to RP-SMA Series coaxial pigtails have medium-sized, threaded coupling connectors designed for use from DC to 11 GHz.

Their consistently low broadband VSWR have made them popular over the years in many applications.

The MMCX to RP-SMA series pigtail is impedance matched to 50 ohm cables.

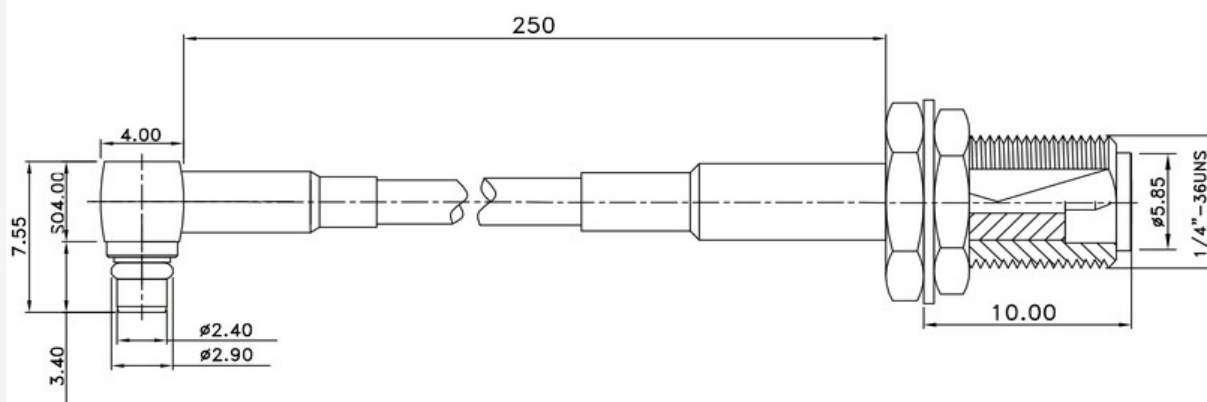

### TECHNICAL SPECIFICATIONS

Impedance	50 ohm
Frequency Range	0 to 11.0 GHz
V.S.W.R.	1.3 max
Working Voltage	1,000 volts rms max at sea level
Dielectric Withstanding Voltage	2,500 volts rms max at sea level
Contact Resistance	Center contact=1.0 Milliohms max
Contact Resistance	Outer contact=1.0 Milliohms max
Insertion Loss	< 2,5 dB
Insulation Resistance	5,000 Megohms min
Connector Body (MMCX/RP-SMA)	(Gold/Gold) Plated
Center Pin	Gold Plated
Dielectric	Teflon
O-Ring	Not Present
Cable Type	LMR100

### Connector 1

MMCX



Male Body  
Male Center Pin

### Connector 2

RP-SMA



Male Thread  
Male Center Pin

### Additional Images

